

Applies to gas solenoid valves 201181, 201183, 201208, 10014476



Read the installation instructions for the units and observe the safety information.

The target group for this installation manual is trained qualified personnel entrusted with the technical functioning and operation of the unit.

Safety

Organizational measures

Risk of property damage and personal injury from lack of organizational measures

- Use equipment and protective gear suitable for the activity.

Danger of electric shock from live components.

- Prior to working on the electrical system, switch off the unit, disconnect the electrical system from the mains and prevent power from being switched on again. Check to ensure the system is dead.
- Use only insulated tools.

Risk of explosion and fire from improper connection

- Prior to working on the gas system, switch off the unit, close the gas supply from the gas system and secure it against being reopened. When bleeding air or degassing, ensure that the air and gas are discharged to the outside in a technically correct manner and without creating a risk.

Preparations

Remove the left side wall.

Overview

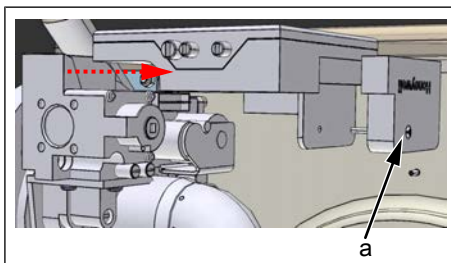


Image: Fastening the ignition electrode

a Screw

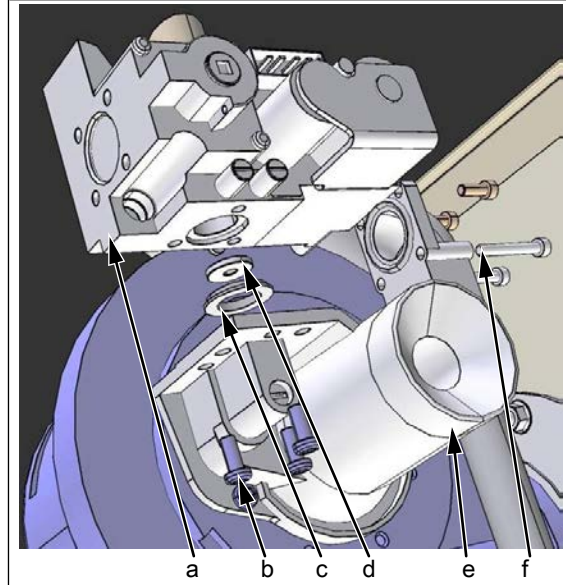


Image: Fastening the gas solenoid valve

- | | |
|----------------------|---|
| a Gas magnetic valve | b Screws for fastening the gas solenoid valve |
| c Seal | d Gas orifice |
| e Venturi pipe | f Screws for gas hose (supply line) |

Disassembly

Ignition electronics

- Remove screw.
- Remove the cover.
- Remove electrical connections.
- Remove ignition electronics from the solenoid valve.

Magnetic valve

- Remove supply pipe from Venturi pipe
- Remove three fastening screws from the Venturi pipe.
- Remove magnetic valve.
- Detach gas hose.
- Remove gas orifice and seal.

Assembly

- Reassembly is carried out in reverse order.
 - ↳ Install screws for the gas hose using threadlocker (e.g. Loctite 586) and tighten to a torque of 3 Nm.
 - ↳ Install screws for the Venturi pipe using anti-seize paste and tighten to a torque of 3 Nm.

Gas solenoid valve mounting instructions

WARNING

Risk of asphyxiation and explosion from damaged seals

- Check seals for damage.
 - Replace damaged seals.
-

WARNING

Risk of explosion and fire from leaking, gas-conducting parts

- Heed tightening torques for the screw connections.
 - Check the gas connection line and all gas-conducting parts for leaks at the operating pressure.
-

NOTICE

Risk of poisoning from exhaust gases

- CO₂ calibration required.
 - ⇒ Perform CO₂ calibration according to installation instructions/service instructions.
-