




Read the operating instructions prior to commissioning

Smoker box

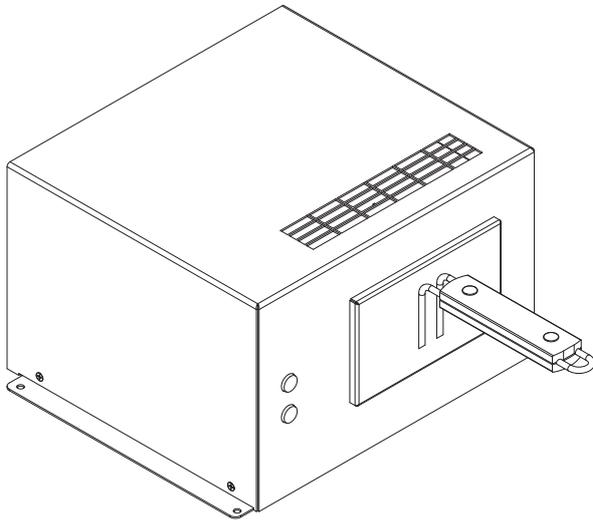

1 Introduction	5
1.1 About this manual	5
1.1.1 Explanation of signs	6
1.2 Intended use	7
1.3 Warranty	7
2 Safety instructions	8
3 Description of the unit	9
3.1 Overview of the unit	9
3.2 Function of the display elements	10
4 Using smoker box	11
4.1 Preparing smoker box	11
4.2 Smoking	12
4.3 After smoking	14
4.4 Pausing and finishing use	15
5 Cleaning and caring for the smoker box	16
5.1 Preventing corrosion	16
5.2 Remove rust spots	16
5.3 Cleaning the housing	17
5.4 Cleaning the suction pipe	17
6 Troubleshooting	19
6.1 Causes of errors and remedies	19
6.2 Nameplate	19
7 Carrying out maintenance	20
7.1 Filling out the maintenance certificate	20
8 Dispose of unit in an environmentally responsible manner	22

1 Introduction

1.1 About this manual

The operating instructions are part of the unit and contain information:

- On safe operation,
- On cleaning and care,
- On remedies in case of faults.

Be aware of the following notes and adhere to them:

- Read the operating instructions completely before operating the unit for the first time.
- Make the operating instructions available to the operator at all times at the operating site of the unit.
- Insert any supplements from the manufacturer.
- Keep the operating instructions throughout the service life of the unit.
- Pass on the operating instructions to any subsequent operator of the unit.

Target group The target group of the instruction manual is the operator, who is entrusted with the operation, cleaning and care of the unit.

Figures All figures in this manual are intended as examples. Discrepancies between these and the actual unit can arise.

1.1.1 Explanation of signs

 **DANGER**

Imminent threat of danger

Failure to comply will lead to death or very severe injuries.

 **WARNING**

Possible threat of danger

Failure to comply can lead to death or very severe injuries.

 **CAUTION**

Dangerous situation

Failure to comply can lead to slight or moderately severe injuries.

ATTENTION

Physical damage

Failure to comply can cause physical damage.

INFORMATION

Information

Notes for better understanding and operation of the unit.

Symbol / sign	Meaning
•	Listing of information.
→	Action steps, which can be performed in any sequence.
1. 2.	Action steps, which must be performed in the specified sequence.
↳	Result of an action performed or additional information about it.

1.2 Intended use

This unit is intended to be used solely for commercial purposes, particularly in commercial kitchens.

This unit may only be used with suitable accessories and for the cooking of food.

It is forbidden to use the unit for purposes, which include the following:

- As set-down area in or on the unit
- Heating rooms

1.3 Warranty

The warranty is void and safety is no longer assured in the event of:

- Improper conversion or technical modifications of the unit,
- Improper use,
- Incorrect startup, operation or maintenance of the unit,
- Problems resulting from failure to observe these instructions.

2 Safety instructions

The unit complies with applicable safety standards. Residual risks associated with operation or risks resulting from incorrect operation cannot be ruled out and are mentioned specifically in the safety instructions and warnings.

The operator must be familiar with regional regulations and observe them.

The operator must also observe the Safety information given in the operating instructions for the Combisteamer.

Hot surfaces Risk of burns from hot surfaces

- Protect arms and hands by wearing suitable protective gloves.
- Do not touch heating elements, hot surfaces or accessories immediately after use.
- Allow surfaces to cool prior to cleaning.

Fire prevention Risk of fire from overheating

- Observe the unit during operation.

Firefighting

- In the event of a fire, disconnect the unit from the electric mains.

Improper cleaning Risk of chemical burns from cleaning agent

- Follow the instructions of the cleaning agent manufacturer.

Risk of physical damage from improper cleaning

- Clean the unit after using it.
- Do not clean the unit with a high-pressure cleaner or water jet.
- Do not cool shock the unit by cooling it abruptly.
- Do not immerse the housing in water.
- Clean the unit regularly.

3 Description of the unit

The smoker box is permanently installed on the Combisteamer and enables smoking to be carried out in the cooking zone. Smoking can be programmed into the cooking processes.

3.1 Overview of the unit

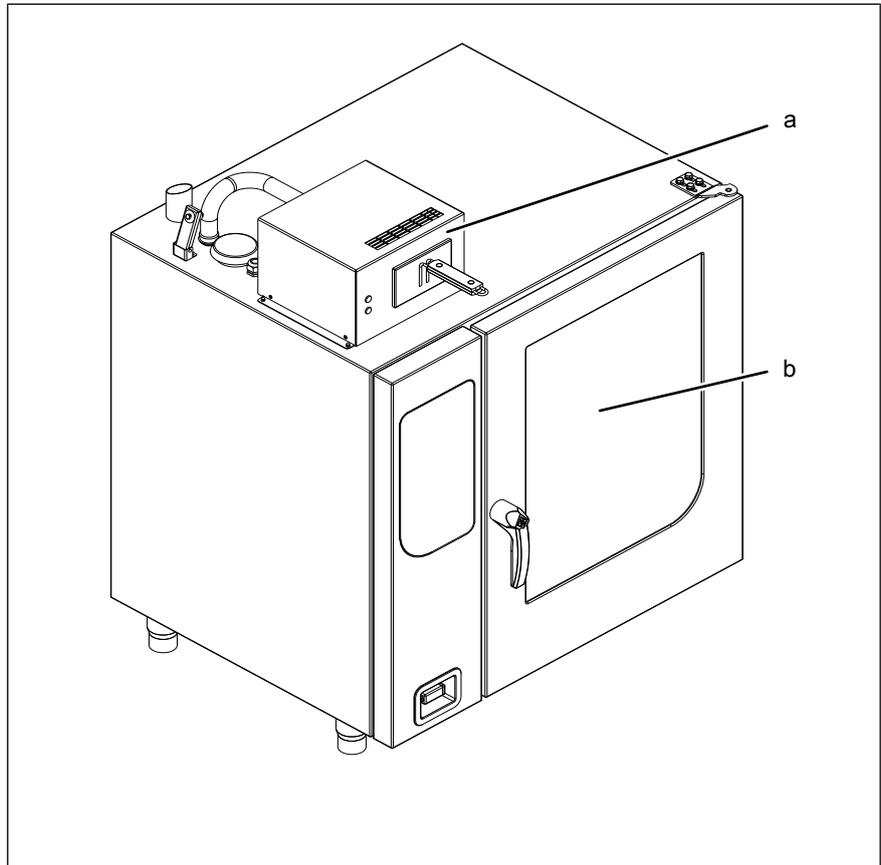


Image: Combisteamer with smoker box

a Smoker box

b Combisteamer

Description of the unit

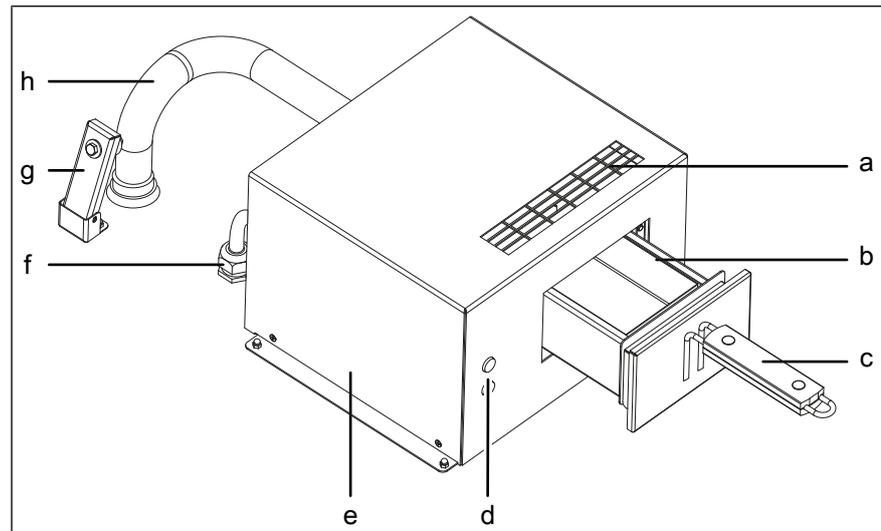


Image: Smoker box

- | | |
|----------------------|-------------------------------------|
| a Ventilation grille | e Housing |
| b Embers box | f Supply line |
| c Handle | g Latch for <i>exhaust air pipe</i> |
| d Display elements | h Exhaust air pipe |

3.2 Function of the display elements

Display element	Function
Indicator light for <i>safety temperature limiter</i>	<ul style="list-style-type: none"> • Illuminates red, if the safety temperature limiter of the smoker box has tripped.
<i>Heating</i> indicator light	<ul style="list-style-type: none"> • Illuminates green, when the smoker box is heating.

4 Using smoker box

WARNING

Risk of explosion and fire

- Do not use any fuel in powder form, for example smoked powder or sawdust.
- Make sure that the wood shavings are of a sufficient size.
- The wood shavings must have an edge length of at least 0,2 in.

INFORMATION

If the smoker box is not being used, the piping between the Combisteamer and the smoker box must be removed, so that the Combisteamer can function properly. To do this, release the exhaust air pipe from the suction pipe, turn it clockwise and then close the latch for the *exhaust air pipe*.

4.1 Preparing smoker box

INFORMATION

Nature and source of danger

Too large a quantity of wood shavings means that the smoking is too long, so measure the quantity on the low side.

INFORMATION

Nature and source of danger

The wood shavings must be at least 0,2 x 0,2 in.

Tip

- So that the wood shavings do not burn too quickly, place the wood shavings in water for about 3 hours before smoking and allow them to soak. Put the wood shavings in a screen and allow them to dry for about 1 hour before using.
- In order to achieve a rapid build-up of smoke, fill about 1/3 of the embers box with dry wood shavings and then fill up with the soaked wood shavings.

1. Open the latch for *exhaust air pipe*.
2. Turn the exhaust air pipe anti-clockwise and connect it to the Combisteamer's suction pipe.
3. Pull out the cooled embers box.
4. Check whether there are any remnants in the embers box or smoker box and dispose of these in a safe manner.
5. Measure out the wood shavings or spices in the quantity that is required for the desired smoking process.
6. Place the wood shavings or spices in the embers box.
7. Close the embers box.

4.2 Smoking

⚠ CAUTION

Risk of burns from remnants of embers

Failure to take precautions can lead to slight or moderately severe burns.

- Protect the face with suitable face protection.
- Protect arms and hands by wearing suitable protective gloves.
- Do not dampen the wood shavings with the hand shower before or during the smoking process.
- Do not regulate or stop the smoking process with the hand shower.

⚠ CAUTION

Risk of fire from switching off the Combisteamer during the smoking procedure

Only switch off the Combisteamer, when the smoking procedure is ended.

Smoking as stand-alone cooking program

As a constituent part of Ready2Cook, the cooking step starts automatically with a ten-minute smouldering in the smoker box. At the same time the cooking zone is heated to the desired cooking temperature. It is not therefore necessary to select a specific *Smouldering* cooking step.

Smoking as the first cooking step in a cooking program that comprises several cooking steps

As a constituent part of Ready2Cook, the cooking step starts automatically with a ten-minute smouldering in the smoker box. At the same time the cooking zone is heated to the desired cooking temperature. It is not therefore necessary to select a specific *Smouldering* cooking step.

Smoking as a follow-on cooking step in a cooking program that comprises several cooking steps


In this case a ten-minute *Smouldering* cooking step must first be selected, and then after that the cooking step with the desired smoking intensity.

Requirements Smoker box prepared
Combisteamer switched on


1. Tap the "Manual cooking" field.



2. Tap the "Smoking" field. (a)

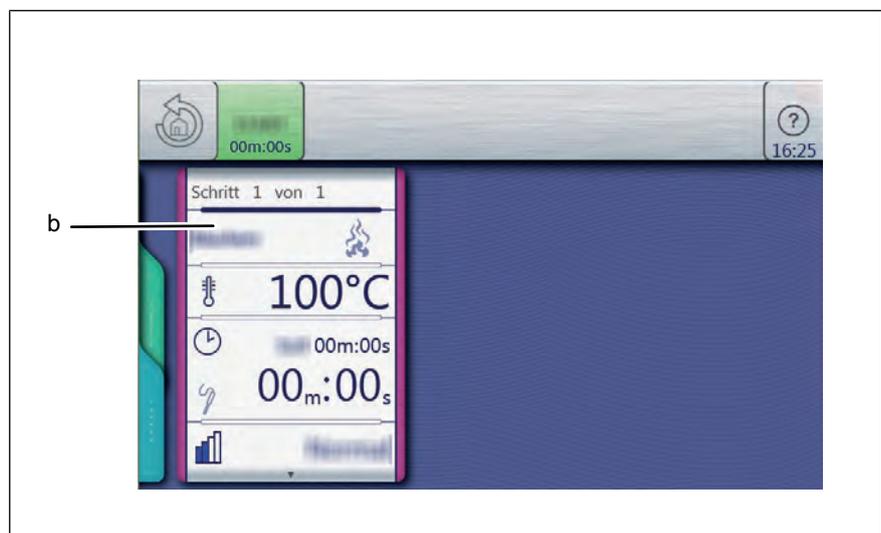

3. Tap the "Smoking" field. (b)

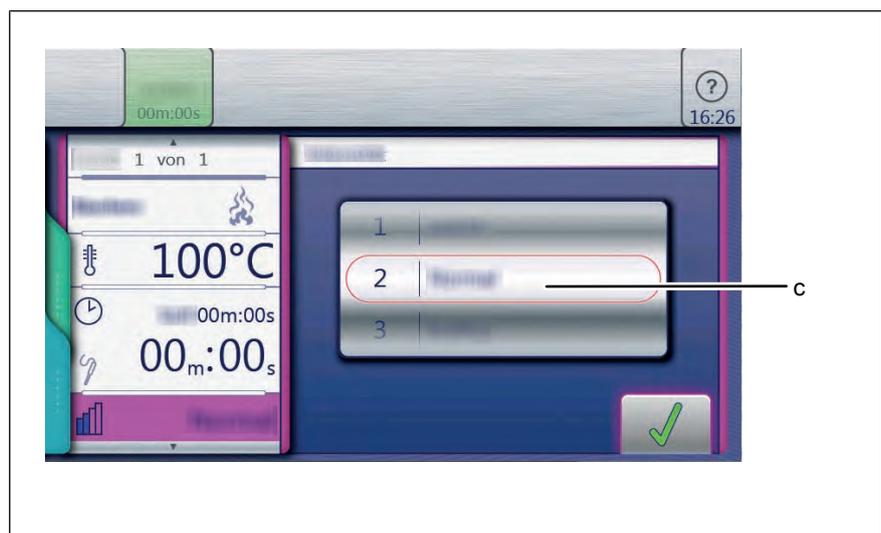

4. Select *Intensity* with a wiping gesture (c).
5. Confirm the selection.

6. Set the cooking temperature and cooking time.
 7. Confirm the selection.
- ↳ Smoking starts.

INFORMATION

The preheat time for the smoker box is 10 minutes. During this time the cooking zone is increasingly filled with smoke.

Tip

- So that the wood shavings do not burn too quickly, place the wood shavings in water for about 3 hours before smoking and allow them to soak. Put the wood shavings in a screen and allow them to dry for about 1 hour before using.
 - In order to achieve a rapid build-up of smoke, fill about 1/3 of the embers box with dry wood shavings and then fill up with the soaked wood shavings.
-

4.3 After smoking

CAUTION

Risk of burns from hot surfaces

- Allow surfaces to cool prior to cleaning.
-

CAUTION

Risk of burns from hot ashes or remnants of embers

The remnants in the embers box may still be hot after smoking and can cause burns.

- Protect the face with suitable face protection.
 - Do not cool down the embers box or the embers with the hand shower.
 - Only pull out the embers box, when it has cooled down.
 - Do not pull out the embers box, if anybody is underneath it.
 - Only store and transport ashes in a closed fireproof container.
-

CAUTION

Risk of fire from hot ashes or remnants of embers

The remnants in the embers box may still be hot after smoking and can quickly ignite topped up material.

- Only load wood shavings into an empty embers box.
-

Requirements Loaded shavings completely extinguished
Smoker box cooled down

1. Pull the embers box out of the smoker box and place it on a fireproof surface.
 2. Empty the embers box into a fireproof container.
 3. Push the embers box back into the smoker box.
-

4. If the smoker box is not to be used subsequently: Release the exhaust air pipe from the suction pipe, turn it clockwise and then close the latch for the *exhaust air pipe*.

4.4 Pausing and finishing use

Switch off the unit during pauses and at end of use.

5 Cleaning and caring for the smoker box

CAUTION

Risk of burns from hot surfaces

- Allow surfaces to cool prior to cleaning.

CAUTION

Risk of chemical burns from cleaning agent

- Follow the instructions of the cleaning agent manufacturer.
- Take appropriate protective measures when handling aggressive cleaning agents.

ATTENTION

Risk of physical damage from extremely abrupt cooling

- Do not cool shock the unit by cooling it abruptly.

ATTENTION

Risk of physical damage from improper cleaning

- Do not clean the unit with a high-pressure cleaner or water jet.

5.1 Preventing corrosion

- Keep the surfaces of the unit clean and with access to air.
- Remove lime, grease, starch and protein deposits from the surfaces of the unit.
- Only expose parts made from non-rusting steel to brief contact with highly acidic foods, spices, salts or the like.
- Avoid damaging the stainless steel surface with other metal items, such as for example steel spatulas or steel wire brushes.
- Avoid contact with iron and steel, such as for example steel wool and steel spatulas.
- Do not use bleaching or chlorine-containing cleaning agents.
- Clean the contact surfaces with water.

5.2 Remove rust spots

- Remove fresh rust spots with a mild abrasive or fine sandpaper.
- Always remove rust spots completely.
- Expose treated areas to fresh air for at least 24 hours. During this time, do not allow any contact with greases, oils or foods so that a new protective layer can form.

5.3 Cleaning the housing

Requirement Unit switched off and cooled down

→ Clean the housing with warm water and commercially available washing-up liquid.

5.4 Cleaning the suction pipe

INFORMATION

Cleaning interval

Cleaning of the suction pipe depends on the degree of contamination and the intensity of use, but it must be cleaned after 3 months at the latest.

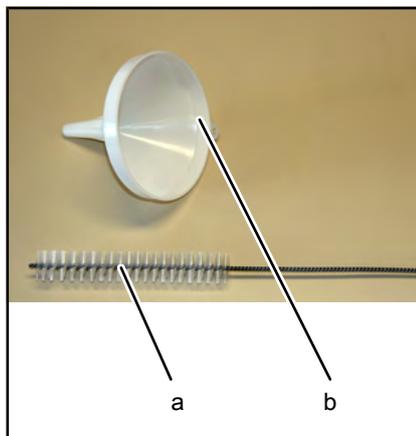


Image: Cleaning accessories

a Brush

b Filling funnel

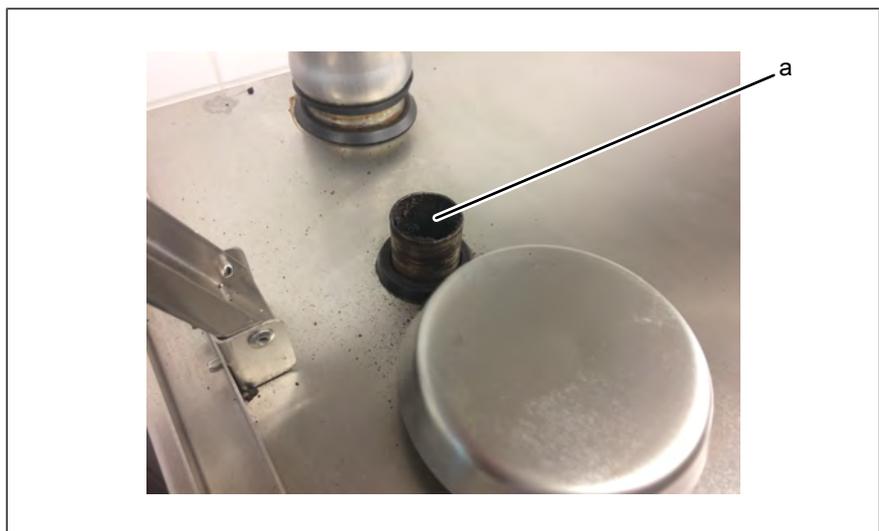


Image: Combi-steamer with the smoker box removed

a Suction pipe

Requirements Combisteamer switched off and cooled down

Cooking zone door closed

Brush, filling funnel and warm water with a commercially available cleaning agent have been provided

The ladder is standing securely in cases where the suction pipe can not be reached without climbing aids.

1. Put the filling funnel on the open suction pipe.
2. Allow 1 litre of soapy water to run through the filling funnel into the suction pipe.
3. Remove the filling funnel.
4. Push the brush from above into the suction pipe.
5. Clean the entire suction pipe.
6. Remove the brush.
7. Put the filling funnel on the suction pipe.
8. Allow 1 litre of soapy water to run through the filling funnel into the suction pipe.
9. Clean the entire suction pipe with the brush.
10. Repeat the process, until the soapy water is clear when running into the cooking zone.
 - ↳ The suction pipe is now cleaned.
11. Remove coarse contamination from the cooking zone.
12. Clean the cooking zone with WaveClean.
 - ↳ Suction pipe and cooking zone cleaned.

6 Troubleshooting

6.1 Causes of errors and remedies

Failure	Possible causes	Remedy
Indicator light for <i>safety temperature limiter</i> illuminates red	Safety temperature limiter tripped	<ul style="list-style-type: none"> • Allow the smoker box to cool down. Check and clean the supply air routing. • If the fault persists, contact Customer service. Do not use the unit.

6.2 Nameplate

The nameplate is located on the Combisteamer.

When contacting Customer service, please always provide the following data from the nameplate:

Serial number (SN)	
Type number (TYP)	

7 Carrying out maintenance

The manufacturer specifies maintenance of the unit in accordance with the following table.

Maintenance	Maintenance interval	Carried out by
Checking if the pipe connections leak	• 12 months	Service technician
Cleaning	• 3 months	Operator

7.1 Filling out the maintenance certificate

The regular maintenance of the unit must be performed and logged in accordance with the maintenance instructions.

Maintenance task	Date	Company, person	Signature
Maintenance task	Date	Company, person	Signature
Maintenance task	Date	Company, person	Signature
Maintenance task	Date	Company, person	Signature
Maintenance task	Date	Company, person	Signature
Maintenance task	Date	Company, person	Signature
Maintenance task	Date	Company, person	Signature
Maintenance task	Date	Company, person	Signature
Maintenance task	Date	Company, person	Signature
Maintenance task	Date	Company, person	Signature
Maintenance task	Date	Company, person	Signature
Maintenance task	Date	Company, person	Signature
Maintenance task	Date	Company, person	Signature
Maintenance task	Date	Company, person	Signature

FM05-265A

Carrying out maintenance

Maintenance task	Date	Company, person	Signature
Maintenance task	Date	Company, person	Signature
Maintenance task	Date	Company, person	Signature

8 Dispose of unit in an environmentally responsible manner

The unit has been designed to provide a lifetime of 10 years with average use.

Do not dispose of unit or the unit's components together with non-recyclable waste. If the unit is disposed of together with non-recyclable waste or treated improperly, toxic substances contained in the unit can damage health and pollute the environment.

Dispose of the unit in accordance with local regulations for used appliances. Clarify any open questions with the responsible agencies (for instance, solid waste management).

Unit In addition to valuable materials, used electrical and electronic equipment also contains harmful substances that were needed for their operation and safety.

Cleaning agents Dispose of leftover cleaning agents and cleaning agent containers in accordance with the information provided by the cleaning agent's manufacturer. Observe applicable regional regulations.



Henny Penny Corporation
P.O.Box 60
Eaton, OH 45320
USA

Telefon +1 937 456-8400
Telefax +1 937 456-8402

Toll free in USA
Telefon +1 937 417-8417
Telefax +1 937 417-8434